

# **Product Details**

# C393 Non-Trapped Body

# **Technical Data**



# Dimensions: 200 dia. body 115 - Height below Body Flange -30 to 10 - add to overall grating/cover height for min/max height between body flange and FFL Connection - 3" BS416 (75mm) / Harmer SML Free Area - 44cm<sup>2</sup> Materials - Cast iron, lacquered Weight - 3.3 kg Note: Membrane clamping collar C.C3 or C.C also required if using with a Vari-Level top. (priced separately from body)

### **General Description:**

Cast Iron C series Vari-Level Non-Trapped Body (Shallow Sump), with 87 dia. vertical outlet. C Series Vari-Level gullies are suited for a wide range of applications.

#### **Options:**

To specify an option, add option letter(s) as a suffix to the Spec. Code W - weepholes (provide supplementary drainage at membrane level) - add suffix "W" to membrane clamping collar spec. code


### Materials:

**Cast Iron - BS EN 1561:** Used for bodies, membrane clamping collars, spigot adaptors and accessories such as extensions. A widely used metal in the drainage industry, its resistance to corrosion permits extended use under extreme conditions. Castings are coated with a high grade lacquer paint to provide internal and external surface coverage. Paint will gradually wear off and is replaceable; oxidisation (surface rusting) is a natural process which does not weaken the material. A zinc anti-corrosion coating is applied to certain castings by sherardizing.

All dimensions are in millimetres unless stated. In line with general practice all dimensions shown are nominal.

# **Typical Installation for C393:**

Note: This illustration may show a similar Wade Product - it is intended to show the general installation type only.

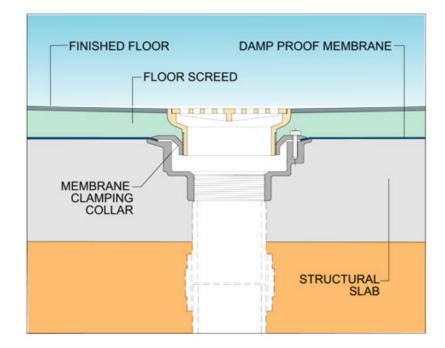

**Dimensioned Section for C393:** 

